

Straumann®
Dental Implant System
System Overview

BONE LEVEL
PROSTHETICS

MRK.032.Rev.05

Soft Tissue Management
Temporary Restorations
מבנים זמניים וכיפות ריפוי

Transfer Parts טרנספרים

Impression Posts
Implant Analogs

טרנספרים ואנלוגים

Digital Impression Posts
Scanbodies and Repositionable
Analogos

פיני סריקה ואנלוגים דיגיטלים

Prosthetic Restoration חלקי שיקום

Titanium Abutments

מבנים מטיטניום

Plastic Copings
Titanium Copings

שרוולי יציקה
בלנק טיטניום
(SRA) חלקי על למולטי יונים

CoCr Abutments
Locator
לוקייטור, מבנה ליציקה
קובלט כרום

Auxiliary Parts
Screws

חלקים גלויים וברגים

Straumann® Bone Level Implant CrossFit® Connection

SC Ø 2.9

NC

Ø 3.3

NC

RC

Ø 4.1/4.8

RC

Kit BLT Modular קיט מודולרי

Temporary Abutment for Crown		
	Ø	Oval
	1 mm	024.0011
	GH 2 mm	024.0015
	3 mm	024.0016


Temporary Abutments		
	Crown TAN	024.2371
	Bridge TAN	024.2375
	PMMA-Crown	024.2372


Protective Caps		
	H	4.6 mm
		5.1 mm 024.0020-04
		5.1 mm 024.4323-04
		6.6 mm 024.4324-04
		8.1 mm 024.4325-04




Temporary Abutments		
	Crown TAN	024.4371
	Bridge TAN	024.4375
	PMMA-Crown	024.4372

Protective Caps		
	H	5.1 mm 024.0020-04
		5.1 mm 024.4323-04
		6.6 mm 024.4324-04
		8.1 mm 024.4325-04





Closed-tray Impression		Open-tray Impression		Analog	
	025.0020		short 025.0021		025.0023
			long 025.0022		

Closed-tray Impression		Open-tray Impression		Analog	
	025.2201 L: 12 mm		short 16 mm 025.2202		025.2101
			long 24 mm 025.2205		

Closed-tray Impression		Open-tray Impression		Analog	
	Ø 4.6 mm		Crown 025.2246		Ø 4.6 mm
			Bridge/Bar 025.0014		
	Ø 4.6 mm		Crown 025.2244		≤ 0°
			Bridge/Bar 025.0012		

Closed-tray Impression		Open-tray Impression		Analog	
	025.4201 L: 12 mm		short 16 mm 025.4202		025.4101
			long 24 mm 025.4205		

Closed-tray Impression		Open-tray Impression		Analog	
	Ø 4.6 mm		Crown 025.2246		Ø 4.6 mm
			Bridge/Bar 025.0014		
	Ø 4.6 mm		Crown 025.2244		≤ 0°
			Bridge/Bar 025.0012		

SC Metal Scanbody	025.0077	SC Repositionable Implant Analog	025.0024
-------------------	----------	----------------------------------	----------

NC Metal Scanbody	025.0078	Repositionable Implant Analog	025.2102
-------------------	----------	-------------------------------	----------

SRA Metal Scanbody	Ø 4.6 mm 025.0081	SRA Repositionable Implant Analog	025.0008
--------------------	-------------------	-----------------------------------	----------

RC Metal Scanbody	025.0079	Repositionable Implant Analog	025.4102
-------------------	----------	-------------------------------	----------

SRA Metal Scanbody	Ø 4.6 mm 025.0081	SRA Repositionable Implant Analog	025.0008
--------------------	-------------------	-----------------------------------	----------

Screw-retained עבודה מוברגת

Cement-retained עבודה מודבקת

Screw-retained עבודה מוברגת

Screw-retained עבודה מוברגת

Cement-retained עבודה מודבקת

Screw-retained עבודה מוברגת

Screw-retained עבודה מוברגת

Variobase® for Crown		
	Ø	Oval
	1 mm	022.0038
	GH 2 mm	022.0039
	3 mm	022.0040

Anatomic Abutments		
	≤	0° 15°
	GH 2 mm	022.2102 022.2152
	3.5 mm	022.2104 022.2154
	incl. screw	025.2900 025.2900
* Abutment high (AH) - 6mm		
MEIDENTIKA® A Straumann Group Brand		
Standard Abutments		
	GH	0° 18° A 18° B
	1.5	L 100 L 200-1 L 200-2
	3.0	L 100-3 L 200-1-3 L 200-2-3
	incl. screw	L 60

Variobase® for Crown		
	AH 3.5 mm	5.5 mm
	GH 1 mm	025.2921 022.0027
	GH 2 mm	022.0102 022.0106
	GH 3 mm	022.0104 022.0108
incl. screw 025.2900 025.2900		
Variobase® C Cerec Sirona (block S only)		
	GH 1 mm	022.0043
	incl. screw	025.2900

Variobase® for Crown AS - Angulated Screw channel 25°		
	AH 3.5 mm	5.5 mm
	GH 1 mm	022.0084 022.0093
	GH 2 mm	022.0102 022.0106
	GH 3 mm	022.0104 022.0108
incl. screw 025.0055 025.0055		
046.786/7/8° 15/21/27mm		

Variobase® for bridge/bar		
	AH 3.5 mm	5.5 mm
	GH 1 mm	022.0110
incl. screw 025.2926		

Platform Ø 4.6		
	≤	0° 17° 30°
	Ø 4.6 mm	4.6 mm
	1.5 mm	022.01285 – –
	2.5 mm	022.01295 Type A 022.01365 – – Type B 022.01375 – –
	GH 3.5 mm	022.01305 Type A 022.01385 Type A 022.01445 Type B 022.01395 Type B 022.01455
	4.5 mm	– Type A 022.01405 Type A 022.01465 Type B 022.01415 Type B 022.01475
	5.5 mm	– Type A 022.01425 Type A 022.01485 Type B 022.01435 Type B 022.01495
Type A Type B		

Anatomic Abutments		
	≤	0° 15°
	GH 2 mm	022.4102 022.4152
	3.5 mm	022.4104 022.4154
	incl. screw	025.4900 025.4900
* Abutment high (AH) - 8mm		
MEIDENTIKA® A Straumann Group Brand		
Standard Abutments		
	GH	0° 18° A 18° B
	1.5	L 110 L 210-1 L 210-2
	3.0	L 110-3 L 210-1-3 L 210-2-3
	incl. screw	L 60

Variobase® for Crown		
	AH 3.5 mm	5.5 mm
	GH 1 mm	025.4921 022.0026
	GH 2 mm	022.0103 022.0107
	GH 3 mm	022.0105 022.0109
incl. screw 025.4900 025.4900		
Variobase® C		
	GH 1 mm	022.0044
	incl. screw	025.4900
Variobase® for Crown AS		
	AH 3.5 mm	5.5 mm
	GH 1 mm	022.0087 022.0096
	GH 2 mm	022.0103 022.0107
	GH 3 mm	022.0105 022.0109
incl. screw 025.0055 025.0055		
046.786/7/8° 15/21/27mm		
Variobase® for bridge/bar		
	GH 1 mm	022.0111
	incl. screw	025.2926

Platform Ø 4.6		
	≤	0° 17° 30°
	Ø 4.6 mm	4.6 mm
	1.5 mm	022.01325 – –
	2.5 mm	022.01335 Type A 022.01505 – – Type B 022.01515 – –
	GH 3.5 mm	022.01345 Type A 022.01525 Type A 022.01585 Type B 022.01535 Type B 022.01595
	4.5 mm	– Type A 022.01545 Type A 022.01605 Type B 022.01555 Type B 022.01615
	5.5 mm	– Type A 022.01565 Type A 022.01625 Type B 022.01575 Type B 022.01635
Type A Type B		

Locator®		
NC RC		
1mmH	08170	08170
2mmH	08422	08171
3mmH	08423	08172
4mmH	08424	08173
5mmH	08425	08174
6mmH	08426	08175
Up to 20° Divergence Up to 40° Divergence		
8519-10	8540-10	8540-10
15 lbs 3 lbs 5 lbs	0 lbs 1 lbs 2 lbs 4 lbs	0 lbs 1 lbs 2 lbs 4 lbs

Burn-out Copings	
	Crown
	023.0011

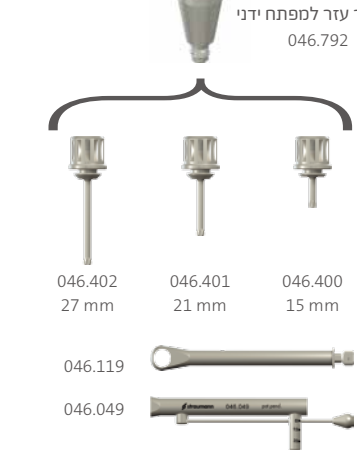
Burn-out Copings for Variobase® for Crown		Burn-out Copings for Variobase® for Crown AS		Burn-out Copings for Variobase® for bridge/bar	
	AH 3.5 mm	AH 5.5 mm		023.0025	
	023.2756	023.0018		023.0029	

SRA Titanium Coping		Variobase® Coping for Screw-retained Abutments		Burn-out Copings for Variobase® Coping for Screw-retained Abutments	
	Ø 4.6 mm		Ø 4.6 mm		Ø 4.6 mm
	Crown 023.4747		023.4747		023.0032
	Bridge 023.4758		023.0028		
	incl. screw		incl. screw		

Burn-out Coping for Variobase® for Crown		Burn-out Copings for Variobase® for Crown AS		Burn-out Copings for Variobase® for bridge/bar	
	AH 3.5 mm	AH 5.5 mm		023.0026	
	023.4759	023.0017		023.0030	

SRA Burn-out Coping, Plastic		SRA Titanium Coping		Variobase® Coping for Screw-retained Abutments		Burn-out Copings for Variobase® Coping for Screw-retained Abutments	
	Ø 4.6 mm		Ø 4.6 mm		Ø 4.6 mm		Ø 4.6 mm
	Crown 023.4748		023.4747		023.4751		023.0032
	Bridge 023.4758		024.0023		023.0028		
	incl. screw		incl. screw		incl. screw		

Instruments and Accessories
ספתחות פרותטיים



ספתחות פרותטיים לזויתן

